

The Many Faces of Miramesh® GR, SG, FR and TR Facing Geogrids

TenCate Miramesh® GR Permanent Vegetated Face Wrap

- Green facing mesh
- Retains soil backfill
- Promotes vegetation growth
- 100% UV Resistance
- Exceeds 75 year design life




TenCate Miramesh® SG Permanent Synthetic Grass Face Wrap

- Green synthetic grass face
- Finished vegetated face
- Maintenance free
- 100% UV Resistance
- Exceeds 75 year design life




TenCate Miramesh® FR Permanent Fire Resistant Face Wrap

- Black facing mesh
- Fire protection coating
- Supports vegetated face
- 100% UV Resistance
- Exceeds 75 year design life



TenCate Miramesh® TR Nonpermanent Face Wrap

- Black facing mesh
- Economical facing reinforcement for temporary facing structures
- Lightweight secondary reinforcement
- Promotes vegetation growth
- Standard UV Resistance

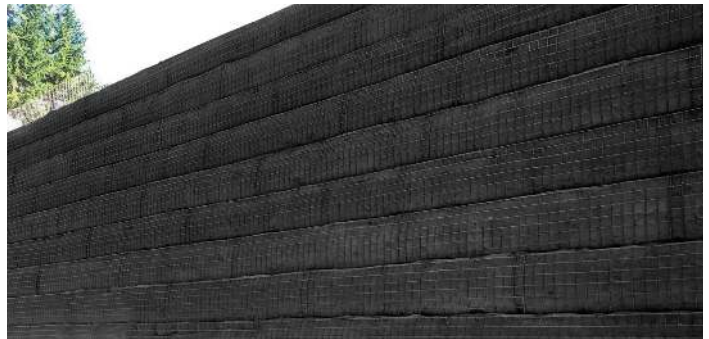


TenCate Miramesh® Applications



Lowe's Store, Western Hills, OH, Height = 65 1H:3V Miramesh GR inside wire basket wall.






Cherry Island Landfill Expansion, Delaware River, Miramesh GR inside wire basket facing, Height = 75 ft.

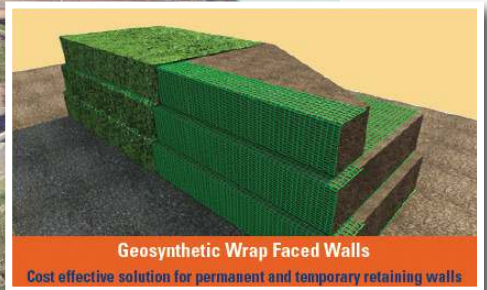

TenCate Miramesh® biaxial geosynthetics are used as a face wrap material for steepened slopes applications and welded wire walls. Miramesh® facing geogrid provides surface erosion protection, which facilitates vegetation growth and secondary reinforcement.

- Made in America
- Permanent facing exceeds 75-year design life
- Highly flexible, UV stable, long-term durability
- Green MSE walls and slopes
- Provides secondary reinforcement so mechanical connection with wire basket is not required
- Supports fast vegetation growth
- Easy and fast to install
- Retains soil while allowing plant growth (see photo)
- QC meets ISO 9001, A2LA, GAI-LAP
- Soil separator screen under ACB's and permeable pavers



365 S. Holland Drive
Pendergrass, GA 30567

Tel 800 685 9990
www.mirafi.com

TENCATE
materials that make a difference

TenCate Geosynthetics Americas assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. TenCate Geosynthetics Americas disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Miramesh® is a registered trademark of Nicolon Corporation.

© 2013 Nicolon Corporation. All Rights Reserved.