

# Envirofelt CO

## Technical Data & Installation Guidelines



TenCate Polyfelt® Envirofelt CO




TenCate Polyfelt® Envirofelt CO is made from 100% natural, biodegradable coconut fibres (coir). The biodegradation process of the coir adds organic nutrients to the soil, thus acting as fertilizer. Envirofelt CO has the necessary strength to hold soil in place, thereby preventing surface erosion.

### Technical Data

| Properties <small>[Standard]</small>            | Unit             | CO 400                              |
|---|------------------|-------------------------------------|
| Type of product                                 | -                | Woven net                           |
| Raw material                                    | -                | 100 % natural coir (coconut fibres) |
| <b>Identification Properties</b>                |                  |                                     |
| Thickness <small>[EN ISO 9863-1]</small>        | mm               | 7                                   |
| Mass per unit area <small>[EN ISO 9864]</small> | g/m <sup>2</sup> | 400                                 |
| Number of yarns                                 | MD               | 30                                  |
|   | CD               | 32                                  |
| Proportion of open area                         | %                | 65                                  |
| <b>Mechanical Properties</b>                    |                  |                                     |
| Tensile strength                                | MD               | kN/m                                |
|   | CD               | kN/m                                |
| Elongation                                      | MD               | %                                   |
|   | CD               | %                                   |
| <b>Forms of Supply</b>                          |                  |                                     |
| Width   | m                | 2.0                                 |
| Length  | m                | 25                                  |
| Area  | m <sup>2</sup>   | 50                                  |
| Bundle weight                                   | kg               | 20                                  |
| Bundles / package                               | no               | 5                                   |

The values given are indicative and correspond to average results obtained in our laboratories and in testing institutes. The right is reserved to make changes without notice.

## TenCate Polyfelt® Envirofelt CO - Installation Guidelines

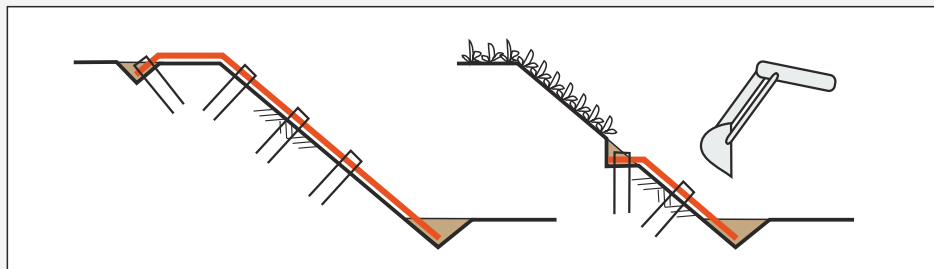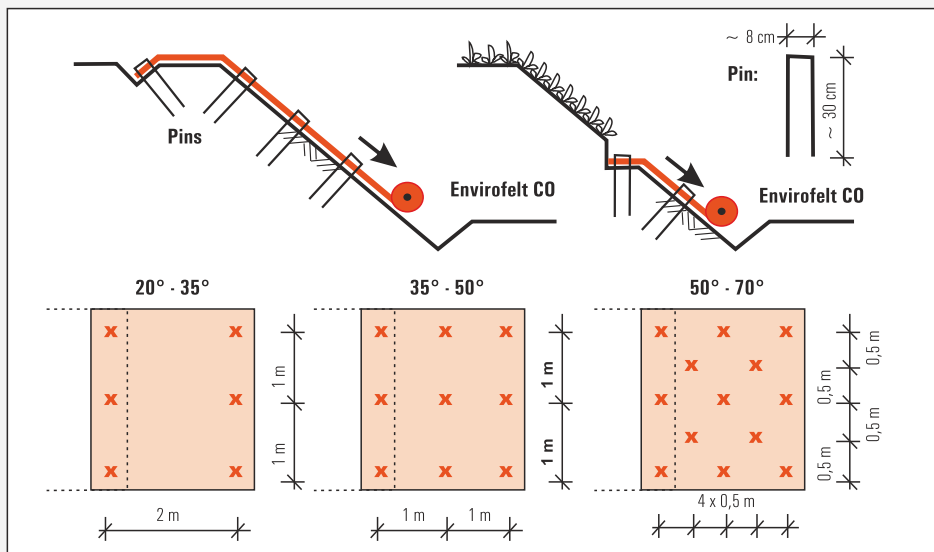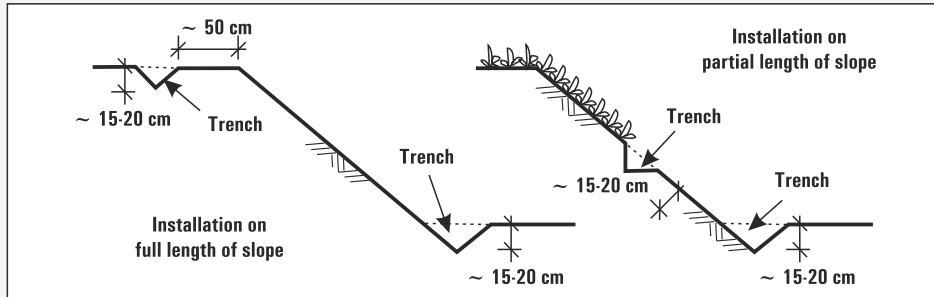

1. The subgrade shall be prepared in accordance with the designer's specification. It shall be smoothly compacted and free from stones, roots or other obstacles.
2. Apply seeds by hand, by hydro-seeding or by other suitable method.
3. Place the erosion-protection mat in the trench and unroll down the slope.
4. Fix the erosion-protection mat according to the sketch, depending on the slope angle. Overlap adjacent panels shall be approx. 5 cm. Pins shall be made from 8 mm steel rods, U-shaped and 30 cm long.
5. Backfill the anchor trench by hand or by excavator, and compact.

The information given in this brochure is to the best of our knowledge true and correct, however new research results and practical experience can make revisions necessary. No guarantee or liability can be drawn from the information mentioned herein. Furthermore, it is not our intention to violate any patents or licences.

### TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 18 Tel. +43 732 6983 0, Fax +43 732 6983 5353  
A-4021 Linz, Austria service.at@tencate.com, www.tencategeosynthetics.com

**BeNeLux** Tel. +31 546 544 811 service.nl@tencate.com  
**Central Eastern Europe** Tel. +43 732 6983 0 service.at@tencate.com  
**Czech Republic** Tel. +420 2 2425 1843 service.cz@tencate.com  
**France / Africa** Fax +33 1 34 23 53 48 service.fr@tencate.com  
**Germany** Tel. +49 6074 3751 61 service.de@tencate.com  
**Italy** Tel. +39 0362 34 58 11 service.it@tencate.com  
**Near Middle East** Tel. +971 4810 3295 service.nme@tencate.com

**Poland** Tel. +48 12 268 8375 service.pl@tencate.com  
**Russia / CIS** Tel. +43 732 6983 0 service.ru@tencate.com  
**Scandinavia / Baltics** Tel. +31 546 544 811 geonordic@tencate.com  
**Spain / Portugal** Tel. +34 607 499 962 service.es@tencate.com  
**Turkey** Tel. +43 732 6983 0 service.tr@tencate.com  
**UK / Ireland** Tel. +44 1952 588 066 service.uk@tencate.com

